


TB OR relay - Electronic timer, delay-on drop-out

Datasheet

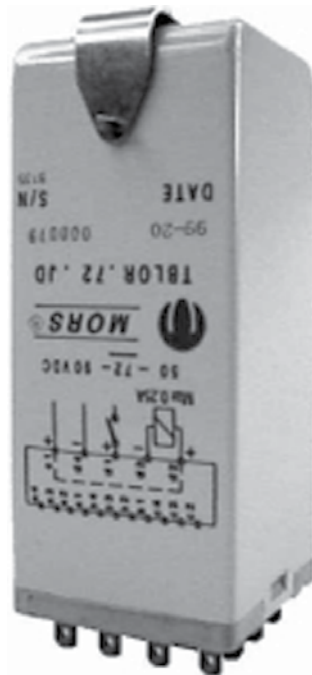

Description

The electronic timer TB OR is a delay-on drop-out timing module. It offers a short range duration (0.25 seconds to 40 seconds) and controls an external load from a common source. The time delay with programmable lag is specified by external connections.

The plug-in design offers secure locking feature for maximum ease of maintenance (no wires need to be disconnected or other hardware removed for relay inspection or replacement). The resistance to impact and vibration is conform to standards in force for Railway Transported Equipment.

Positive mechanical keying of relay to socket is built into relay and socket during manufacture and terminal identifications are clearly marked on identification plate that is permanently attached to the relay..

The TB OR relay is pluggable in the following sockets: EA 102 B, EA 102 BF, EA 103 BF, EA 104 B, EA 104 BF, EA 105 BF, EA 112 BF

Application

The TB OR timing relay is designed for applications with a programmable timing function used for example in HVAC and lighting.

Features

- Delay-on drop-out timing module
- Short time delay range
- Delay range from 0.25 s up to 40 s
- Time delay programmable by external connections
- Plug-in design with secure locking feature for maximum ease of maintenance

Benefits

- Proven reliable
- Long life cycle
- Accurate timing selection finger safe
- Easy to maintain and replace
- Low life cycle cost
- No maintenance

Railway compliancy

- CF 62-003 European railway standard
- NF F 16-101/102 Fire behaviour - Railway rolling stock



TB OR relay

Technical specifications



Functional and connection diagrams

Timing diagram	Relay pin correspondence
<p>Type OR (delay on drop-out) (also called delay on de-Energization, delay OFF or delay on break).</p> <p>Operation: With permanent power supply ON and connected to terminals c1-d4 and timer input ON and connected to terminals d1-d4, the time delay devices operate as follows: When switch is closed, an output signal appears across terminals d2-d3 to actuate load. When switch is opened, the time interval programmed by wiring from tables below begins. At end of interval, the output signal disappears across terminals d2-d3 shutting off the load.</p>	<p>Relay pin correspondence</p> <p>Example: AJ keying</p>

Connection diagram

Connections			Time delay
a1 - a2	b1 - b2	b3 - b4	0,25 s
a1 - a2	b1 - b2		0,50 s
a1 - a2	b1 - b3	b4 - c2	0,75 s
a1 - a2	b1 - b3		1,0 s
a1 - a2	b1 - c4	b2 - b4	1,5 s
a1 - a2	b1 - c4		2,0 s
a1 - a2	b1 - c3	b2 - b4	2,5 s
a1 - a2	b1 - c3		3,0 s
a1 - a2	b1 - c2	b2 - b4	3,5 s
a1 - a2	b1 - c2		4,0 s
a1 - a3	b1 - b2		5,0 s
a1 - a3	b1 - b3	b4 - c2	7,5 s
a1 - a3	b1 - b3		10 s
a1 - a3	b1 - c4	b2 - b4	15 s
a1 - a3	b1 - c4		20 s
a1 - a3	b1 - c3	b2 - b4	25 s
a1 - a3	b1 - c3		30 s
a1 - a3	b1 - c2	b2 - b4	35 s
a1 - a3	b1 - c2		40 s

Time Delay Input Polarity:
d1 must be connected to +
d1 to - is available upon request (NPTBOR)



TB OR relay

Technical specifications

Time characteristics

Time function	Delay-on drop-out
Total time delay range	0.25 s...40 s
Time delay adjustment	Fixed after connecting the terminals
Adjustment / repeatability accuracy	$\pm 10\%$ / $\pm 2\%$

Input data

Keying	U _{nom} (VDC)	U _{operating} (VDC)
AJ	24	17 / 33
PV	48	35 / 60
BJ	72	50 / 90
EJ	125	90 / 156

Electrical characteristics

Operating voltage	24 VDC ...110 VDC
Load voltage drop	< 2 V
Operating current	< 20 mA
Maximum load current	0.25 A
Dielectric strength	2000 VAC, 1 min
Insulation resistance	$\geq 1000\text{ M}\Omega$ at 500 VDC



TB OR relay

Technical specifications

Mechanical & environmental characteristics


Vibration	NF F62-002 The tests are conducted in the X, Y , Z planes at frequency between 10 & 150 cycles (sinusoidal) at 2 g
Shock	NF F62-002 Tests are applied in both directions in the X, Y & Z planes. Then successive shocks are administered consisting of the positive component of sinusoidal with a value of 30 g, 18 ms Other vibration and shock tests can be performed on request
Life	MTBF of 476000 h
Weight	150 g (5.3 ounces)
Temperature	-40 °C...+80 °C
Humidity	93% RH, 40° C for 4 days
Salt mist	5% NaCl, 35° C for 4 days
Protection	IP40 (timing relay on socket)
Fire & smoke	Materials: Polycarbonate (cover) / polyester melamine (base) Note: These materials have been tested for fire propagation and smoke emission according standards NF F 16-101, NF F 16-102. And have been approved to be used on the English/French train channel shuttle.



TB OR relay

Technical specifications

Dimensions (mm)

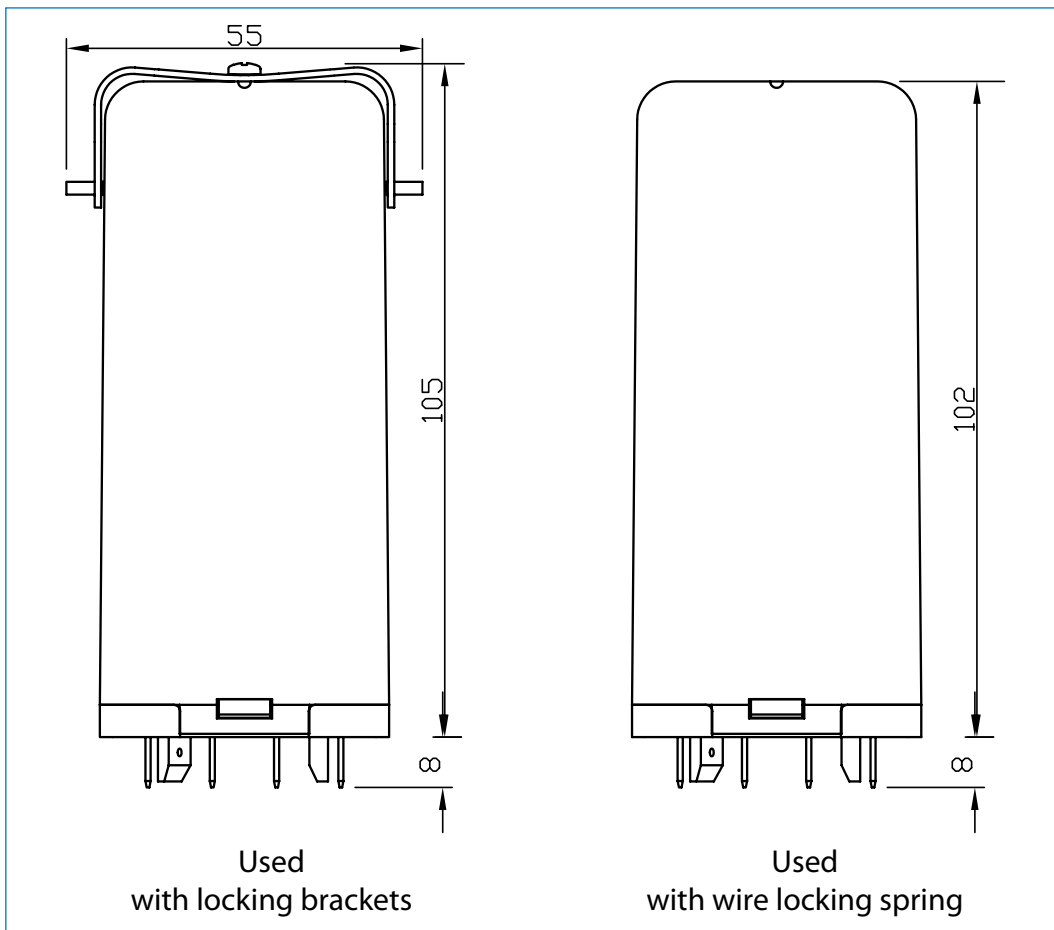


TB OR relay

Notes



TB OR relay

Mounting possibilities / sockets

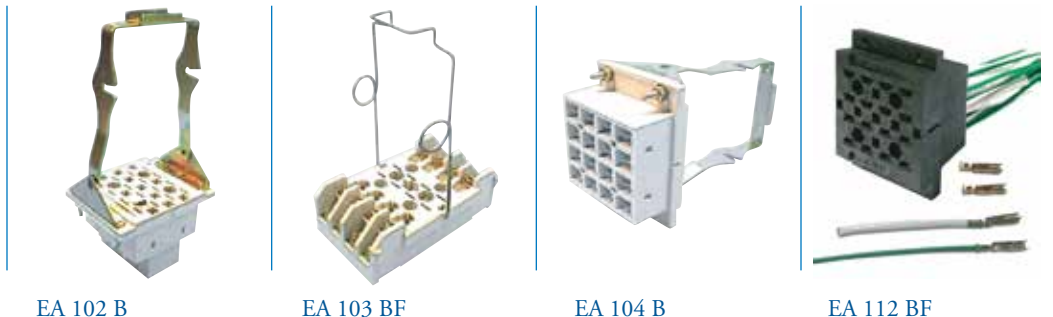

Panel/flush mounting

EA 102 B	Locking bracket (905843), rear connection, double Faston 5 mm
EA 102 BF	Wire locking spring (926853), rear connection, single Faston 5 mm
EA 104 B	Locking bracket (905843), rear connection, single Faston 5 x 0.8 mm
EA 104 BF	Wire locking spring (926853), rear connection, single Faston 5 x 0.8 mm
EA 112 BF	Wire locking spring (926853), rear connection, crimp contact

Surface/wall mounting

EA 103 BF*	Wire locking spring (926853), front connection, M3 screw 6.5 mm ring terminals (2.5 mm ²)
EA 105 BF*	Wire locking spring (926853), front connection, single Faston 5 mm (3/16")

* Mounting possibility on 35 mm rail EN 50022 by adding suffix D to the part number (see socket datasheet)

Note: Keying of relay to socket can be specified by adding the keying letters in the part number. See all details in the related socket datasheet.



TB OR relay

Instructions

Installation

Install socket and connect wiring correctly according identification to terminals. Plug relay into socket. Reverse installation into socket not possible due to mechanical blocking by snap-lock.

Don't reverse polarity of coil connection. Relays can be mounted (tightly) next to each other and in any attitude.

Warning! Never use silicon near by relays

Operation

Before operating always apply voltage to coil to check correct operation.

Long term storage may corrode the silver on the relay pins. Just by plugging the relay into the socket, the female bifurcated receivers will automatically clean the corrosion on the pins and guarantee a good connection.

Do not use the relay in places with flammable gas as the arc generated from switching could ignite gasses.

Maintenance

Correct operation of relay can easily be checked as transparent cover gives good visibility on the moving contacts. When the relay doesn't seem to operate correct, please check presence of coil voltage. Use a multimeter. If LED is used, coil presence should be indicated. If coil voltage is present, but the relay doesn't work, a short circuit of suppression diode is possible (The coil connection was reversed). If relay doesn't work after inspection, please replace relay unit by a similar model. Send defective relay back to manufacturer. Normal wear and tear excluded.



TB OR relay

Ordering scheme

Configuration:



1. Relay model 2. Delay mode 3. Nominal voltage 4. Keying 5. Cover type 6. Language (test report)

This example represents a **TB OR 24 LE F 1**

Description: TBOR relay, U_{nom} : 24 VDC, Keying AJ, relay cover for wire locking spring, test report in English

1. Relay model

TB

2. Delay model

OR	Time delay on drop-out
-----------	------------------------

3 & 4. Nominal voltage and keying

24 AJ	24 VDC
44 PV	48 VDC
72 BJ	72 VDC
125 EJ	110 VDC

5. Relay cover type

–	Relay cover with lock pins
F	Relay cover for wire locking spring

6. Language on test report

–	French
1	English
2	Spanish





Mors Smitt
A Wabtec Company



DS-TB OR relay-V2.0 May 2013



www.morssmitt.com



Mors Smitt France SAS

Tour Rosny 2, Avenue du Général de Gaulle,
F - 93118 Rosny-sous-Bois Cedex, FRANCE
T +33 (0)1 4812 1440, F +33 (0)1 4855 9001
E sales@msrelais.com

Mors Smitt Asia Ltd.

807, Billion Trade Centre, 31 Hung To Road
Kwun Tong, Kowloon, HONG KONG SAR
T +852 2343 5555, F +852 2343 6555
E info@morssmitt.hk

Mors Smitt B.V.

Vrieslantlaan 6, 3526 AA Utrecht,
NETHERLANDS
T +31 (0)30 288 1311, F +31 (0)30 289 8816
E sales@nieaf-smitt.nl

Mors Smitt Technologies Inc.

420 Sackett Point Road
North Haven, CT 06473, USA
T +1 (203) 287 8858, F +1 (888) 287 8852
E mstechnologies@msrelais.com

Mors Smitt UK Ltd.

Doulton Road, Cradley Heath
West Midlands, B64 5QB, UK
T +44 (0)1384 567 755, F +44 (0)1384 567 710
E info@morssmitt.co.uk

(c) Copyright 2013

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract.