

## /// Plug-in railway relay with 2x 2 C/O contacts

Rugged plug-in relays for extreme reliability, within long endurance applications and harsh environments

### WDDE-U200/U300

Timer relay

Part of D-platform



#### Features

- One-shot time delay and instantaneous relay
- Compact plug-in design
- 2 C/O one-shot contacts and 2 C/O instantaneous contacts
- Pulse time adjustable with a lockable knob
- Pulse times between 0.1 s...60 min
- Also available with fixed pulse time (no knob)
- Two LEDs for status indication
- Flat, square and silver plated relay pins for excellent socket connection
- Integrated snap lock
- Optional positive mechanical keying relay to socket

#### Description

Plug-in electronic railway one shot timer relay with two instantaneous change-over contacts and two one shot change-over contacts. When the relay is activated the one shot change-over contacts are activated with one pulse. The pulse time is adjustable with a lockable knob. The relay can also be supplied with a fixed pulse time (no knob). The relay is equipped with two LEDs to indicate presence of power supply and energizing of the coil.

The construction of the relay and choice of materials make the WDDE-U200 /U300 relay suitable to withstand low and high temperatures, shock & vibrating and dry to humid environments.


No external retaining clip needed as integrated 'snap-lock' will hold relay into socket under all circumstances and mounting directions.

Compact design, choice of many options and a wide range of sockets makes the WDDE-U200/U300 relay an easy and flexible solution to use


#### Application

These relay series are designed for demanding rolling stock applications. The WDDE-U200/U300 is used in applications where instantaneous contacts and contacts with one pulse in output are necessary

#### Connection diagram

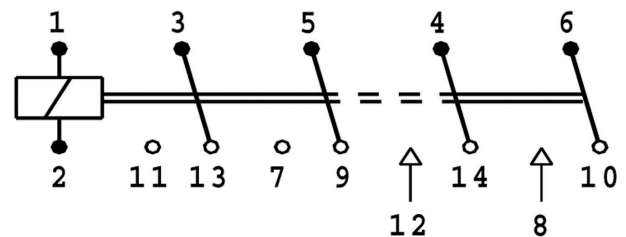

#### Timing diagram

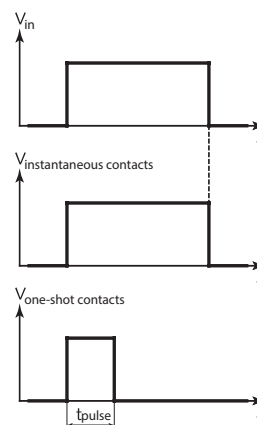

#### Railway compliancy

EN 50155	EN 50121
IEC 60571	EN 45545-2
IEC 60077	NF F16-101/102
IEC 60947	NF F 62-002
IEC 61373	IEC 60947-5-4


## Timer relay WDDE-U200/U300

### Options

- Low temperature (-40 °C), max. contact current 8 A
- Extra dust protection
- Double zener diode

Remark: Not all combinations possible

### Dimensions (mm)

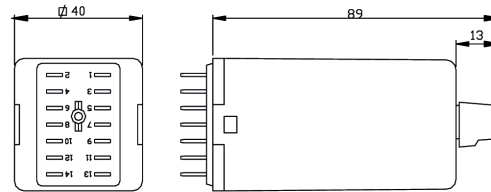

### Sockets

		Mounting			
		Surface / Wall	35 mm rail	Panel / Flush	PCB
Terminal connection	Screw	V23	V23	-	-
	Screw - wide terminals	V22 BR	V23 BR	-	-
	Spring clamp	V29	V29	V33	-
	Faston	-	-	V31	-
	Crimp	-	-	V26	-
	Solder tag	-	-	V3	-
	PCB	-	-	-	V32

For more information see the respective datasheets

For more detailed technical specifications, drawings and ordering information, go to the product page on [www.morssmitt.com](http://www.morssmitt.com)

 **Over 10 million Mors Smitt relays in use in rail transport applications worldwide!**

**Mors Smitt Asia Ltd.**  
 26/F., Casey Aberdeen House  
 38 Heung Yip Road, Wong Chuk Hang  
 Hong Kong  
 Tel: +852 2343 555  
[sales.msa@wabtec.com](mailto:sales.msa@wabtec.com)

**Mors Smitt France SAS**  
 2 Rue de la Mandinière  
 72300 Sablé-sur-Sarthe, France  
 Tel: +33 (0) 243 92 82 00  
[sales.msf@wabtec.com](mailto:sales.msf@wabtec.com)

**Mors Smitt UK**  
 Graycar Business Park,  
 Burton on Trent, DE13 8EN, UK  
 Tel: +44 (0)1283 357 263  
[sales.msuk@wabtec.com](mailto:sales.msuk@wabtec.com)

**Wabtec Netherlands B.V.**  
 Darwinstraat 10,  
 6718 XR Ede, Netherlands  
 Tel: +31 (0)88 600 4500  
[wnl\\_salessupport@wabtec.com](mailto:wnl_salessupport@wabtec.com)

**Mors Smitt Technologies Ltd.**  
 1010 Johnson Drive,  
 Buffalo Grove, IL 60089-6918, USA  
[salesmst@wabtec.com](mailto:salesmst@wabtec.com)

**RMS Mors Smitt**  
 19 Southern Court  
 Keysborough, VIC 3173, Australia  
 Tel: +61 (0)3 8544 1200  
[sales.rms@wabtec.com](mailto:sales.rms@wabtec.com)

(c) Copyright 2023

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.

## Timer relay WDDE-U200/U300

### Technical specifications

#### Time delay characteristics

Time delay function Available pulse times, adjustable	One shot and instantaneous 0.1s...60 min
Accuracy - adjustment	<10 % of full scale After adjusting/fixed time setting: no variation in setpoint
Accuracy - repeatability	< 0.5 %
Time variation vs voltage variation vs. temperature variation	± 0.05 % / % U <sub>nom</sub> ± 0.02 % / K
Pull-in time	< 15 ms
Recovery time	± 0.1%
Release time	< 15 ms
Example time delay : Time delay set on 2 s : delay will be between 1.7 s...2.2 s For example: 2.0 s. The ambient temperature is 40 °C which is 20 degrees different compared to the standard 20 °C. This results in 0.4 % extra time variation. The applied voltage is 30% lower than the nominal voltage. This results in 1.5 % extra time variation. The total maximum time variation is then 0.5 % (repeatability) + 0.4 % (temperature variation) + 1.5 % (voltage variation) = 2.4 %. In this case every new pulse will be between 1.95 s and 2.05 s.	

#### Coil characteristics

Operating voltage range	DC	0.7...1.25 U <sub>nom</sub>
	AC	0.8...1.2 U <sub>nom</sub>
Nominal power consumption	During pulse	< 2.5 W (24 V) < 2.9 W (110 V) < 3.5 W (220 V) Lower voltage = lower power
	After pulse	< 1.3 W (24 V) < 1.7 W (110 V) < 2.0 W (220 V) Lower voltage = lower power

Type	U <sub>nom</sub> (VDC)	U <sub>min</sub> (VDC)	U <sub>max</sub> (VDC)	U <sub>drop-out</sub> (VDC)
WDDE-U201	24	16.8	30	2.4
WDDE-U202	48	33.6	60	4.8
WDDE-U203	72	50.4	90	7.2
WDDE-U204	110	77.0	138	11.0
WDDE-U205	96	67.2	120	9.6
WDDE-U207	36	25.2	45	3.6
WDDE-U208	55	38.5	69	5.5
WDDE-U209	64	44.8	80	6.4
WDDE-U210	120	84.0	150	12.0
WDDE-U211	80	56.0	100	8.0
WDDE-U213	125	87.5	156	12.5
WDDE-U215	200	140.0	250	20.0

Type	U <sub>nom</sub> (VAC)	Frequency (Hz)	U <sub>min</sub> (VAC)	U <sub>max</sub> (VAC)	U <sub>drop-out</sub> (VAC)
WDDE-U306	240	50/60	192.0	288.0	24.0

Other types on request

#### Remarks:

- U<sub>min</sub> is the must-operate voltage at which the relay has picked up in all circumstances (worst-case situation), in practice the relay picks up at a lower voltage
- U<sub>drop-out</sub> is the must-release voltage at which the relay has dropped-out in all circumstances (worst-case situation), in practice the relay drops out at a higher voltage (U<sub>release</sub>)
- To reset the time function, the voltage must drop below U<sub>drop-out</sub>
- Always select the nominal voltage as close as possible to the actual voltage in the application

## Timer relay WDDE-U200/U300

### Contact characteristics

Amount and type of contacts	2 C/O instantaneous and 2 C/O one-shot
Maximum make current	14 A
Maximum continuous current	8 A (AC1 ; IEC 60947)
Maximum switching voltage	250 VDC 250 VAC
Minimum switching voltage	12 V
Minimum switching current	100 mA
Maximum breaking capacity	See graph page 6
Contact resistance	25 mΩ (initial)
Material	AgNi

### Electrical characteristics

Dielectric strength	IEC 60255-5	Pole-pole	2.5 kV, 50 Hz, 1 min
	IEC 60077	Cont-coil	2.0 kV, 50 Hz, 1 min
		Open contacts	1.0 kV, 50 Hz, 1 min
Pulse withstanding	IEC 60255-5		5.0 kV (1.2/50 μs)

### Mechanical characteristics

Mechanical life	10 x 10 <sup>6</sup> operations
Maximum switching frequency	Mechanical: 3600 ops/h Electrical: 1200 ops/h
Torque value screw to lock knob	0.2-0.4 Nm
Weight	112 g (without options)

### Environmental characteristics

Environmental	EN 50125-1 and IEC 60077-1
Vibration	IEC 61373, Category I, Class B, Body mounted
Shock	IEC 61373, Category I, Class B, Body mounted
Operating temperature	-25 °C...+70 °C (optional: -40 °C)
Humidity	93 %
Salt mist	IEC 60068-2-11, class ST4
Damp heat	IEC 60068-2-30, Test method Db variant 1
Protection	IEC 60529, IP40 (relay on socket) (with option K: IP50)
Fire & smoke	NF F 16-101, NF F 16-102, EN 45545-2
Insulation materials	Cover: polycarbonate Base: polyester

## Timer relay WDDE-U200/U300

### Railway compliancy

EN 50155	Railway applications - Rolling stock - Electronic equipment
IEC 60571	Railway applications - Electronic equipment used on rolling stock
IEC 60077	Railway applications - Electric equipment for rolling stock
IEC 60947	Low-voltage switchgear and controlgear
IEC 61373	Railway applications - Rolling stock equipment - Shock and vibration tests
EN 50121	Railway applications - Electromagnetic compatibility
NF F16-101/102	Railway rolling stock - Fire behavior
EN 45545-2	Railway applications - Fire protection on railway vehicles Part 2: Requirements for fire behavior of materials and components
NF F 62-002	Railway rolling stock - On-off contact relays and fixed connections


### Options

Code	Description	Remark	Cannot be combined with:
Standard options:			
C	Low temperature (-40 °C)	Icontact < 8 A	
K	Extra dust protection	IP50 Cat 2 for the relays mounted in a Mors Smitt socket. Application PD1/PD2 and contact load > 0.5 A.	
Q	Double zener diode over coil	Maximum allowed peak voltage 180 V, higher voltage will damage the diode	


**Timer relay**  
**WDDE-U200/U300**

**Breaking capacity and contact life**

**Max. DC Load Breaking Capacity**  
with resistive load

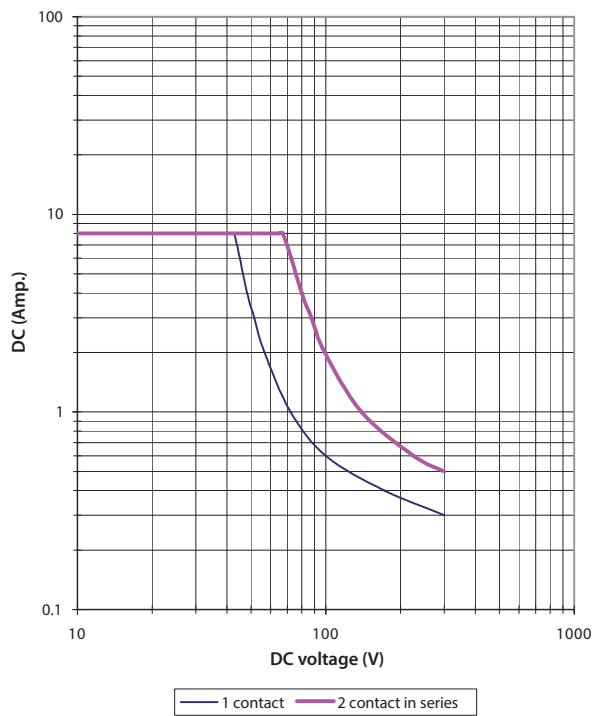

**Contact life**  
for resistive AC load single contact

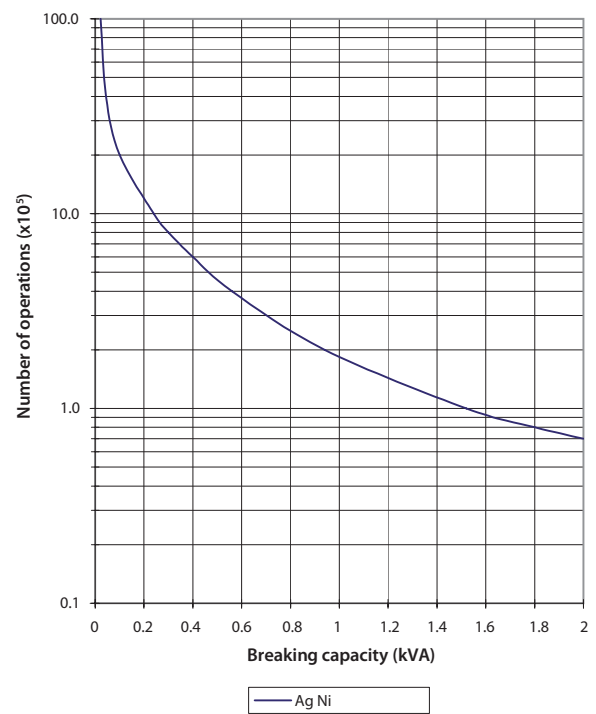

## Timer relay WDDE-U200/U300

### Mounting possibilities/sockets



#### Surface/wall mounting

338000302	V22BR	Screw socket, wall mount, front connection (9 mm terminals)
338000580	V23	Screw socket, wall mount, front connection (7.5 mm terminals)
338000610	V29	Spring clamp socket, wall mount, front dual connection (2.5 mm <sup>2</sup> )

#### Rail mounting

338000580	V23	Screw socket, rail mount, front connection (7.5 mm terminals)
338000402	V23BR	Screw socket, rail mount, front connection (9 mm terminals)
338000610	V29	Spring clamp socket, rail mount, front dual connection (2.5 mm <sup>2</sup> )

#### Panel/flush mounting

338100100	V3	Solder tag socket, panel mount, rear connection
328400100	V26	Crimp contact socket, panel mount, rear connection, A260 crimp contact
338000560	V31	Faston connection socket, rear dual connection (4.8 x 0.8 mm)
338000670	V33	Push-in terminal socket, panel mount, rear dual connection (3.3 mm <sup>2</sup> )

#### PCB mounting


338000561	V32	PCB soldering socket
-----------	-----	----------------------

No external retaining clip needed as the 'snap-lock' will hold the relay into the socket under all circumstances and mounting directions (according shock & vibration requirements IEC 61373, Category I, Class B, Body mounted). If regulations require external retaining clips, these are available as well.

For more details see datasheets of the sockets on [www.morssmitt.com](http://www.morssmitt.com)

**Timer relay**  
**WDDE-U200/U300**

**Mechanical keying relay and socket (optional)**




**Function:**

- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay is inserted in a wrong socket. For example it prevents that a 24 VDC relay is put in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.

The D relay socket keying option gives 8 x 8 = 64 possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explaining.

Remark: Sockets and relay shown are examples.

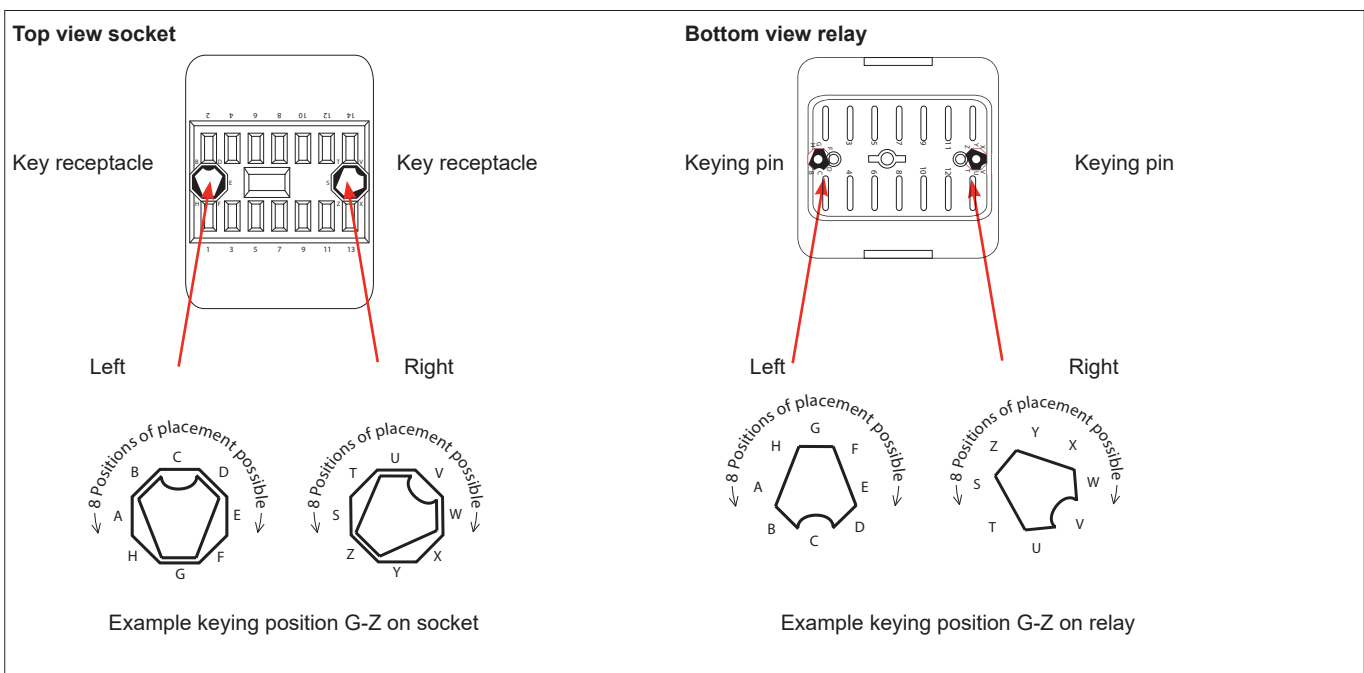



## Timer relay WDDE-U200/U300

### Important for relay selection and operation

Make sure the relay is suitable for the application. For critical applications (for example: green loop applications) relays should be checked on correct working during periodic inspection.

### Recommendations for long time contact reliability

For relays to enable failure free performance over a very long operational time, it is important to create the right circumstances. In any relay, contact usage and atmospheric conditions influence the contact surface. To counter this effect it is common practice to use a safety factor of  $> 2$  to ensure long time contact reliability.

Therefore for long time contact reliability we recommend:

- Silver contacts: a minimum contact current of 20 mA per contact
- Gold contacts: a minimum contact current of 10 mA per contact
- Double Make Double Break contacts: a minimum contact current of 40 mA per contact
- When low currents are switched and not frequently, e.g. 10 mA once a day, it is advised next to gold plated contacts to put similar contacts within the same relay in parallel
- With higher load switching, e.g. 110 VDC and  $> 1$  A, put relay contacts in series
- Rule of thumb: any relay works best with switching currents  $> 20$  mA in DC environment when frequently switched. When not switched frequently a higher switching current like 50 mA is better for a long reliable operational time
- Check relays regularly, for example with the Mors Smitt Portable Relay Tester and visually through the transparent cover


### Instructions for use

#### Installation

Before installation or working on the relay: disconnect the power supply first (no hot swapping)! Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature. Check to ensure that the coil connection polarity is not reversed. Relays can be mounted tightly together to save space. When rail mounting is used, always mount the socket in the direction of the UP arrow, to have proper fixation of the socket on the rail. Torque value screw to lock knob: 0.2-0.4 Nm

#### Warning!

- Never use silicon in the proximity of the relays
- Do not use the relay in the presence of flammable gas as the arc generated from switching could cause ignition
- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires

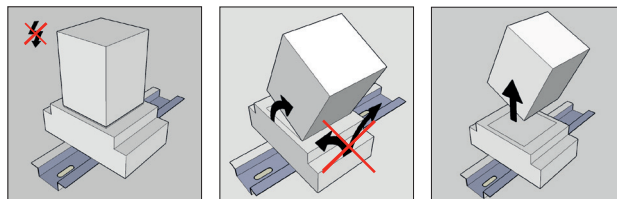

- Relays should never be swapped to other circuit positions when taken out of its socket for inspection or fault finding, always place it back into the original position to prevent contact resistance problems. Contact resistance problems can be created when swapping relays between different circuit loads due the contact wear/condition having changed during its operational life.

#### Operation

After installation always apply the rated voltage to the coil to check correct operation. Long term storage may corrode the silver on the relay pins. When plugging the relay into the socket, the female bifurcated or trifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

Before actual use of relays, it is advised to switch the load several times with the contacts. The contacts will both be electrically and mechanically cleaned due to the positive wiping action. Sometimes a contact can build up increased contact resistance ( $\leq 15$  m $\Omega$  when new). When using silver contacts one can clean the contact by switching a contact load a few times using  $>24$  VDC &  $\sim 2$  A. Increased contact resistance is not always problematic, as it depends on circuit conditions. In general a contact resistance of 1  $\Omega$  is no problem, consult Mors Smitt for more information.

Condensation in the relay is possible when the coil is energised (warm) and the outside, environmental temperature is cold. This is a normal phenomenon and will not affect the function of the relay. Materials in the relay have no hygroscopic properties.

## Timer relay WDDE-U200/U300

### Inspection / maintenance

Correct operation of the relay can easily be checked as the transparent cover provides good visibility of the moving contacts. If the relay does not seem to operate correctly, check for presence of the appropriate coil voltage and polarity using a suitable multimeter. If a LED is fitted, it indicates voltage presence to the coil. If coil voltage is present, but the relay does not operate, a short circuit of the suppression diode is possible (This may have been reversed due to the coil connection).

Relays can easily be tested with the Mors Smitt Relay Tester. More information on: [www.morssmitt.com](http://www.morssmitt.com).

If the relay doesn't work after inspection, replace the relay unit with a similar model. Do not attempt to open the relay cover or try to repair. Contacts are calibrated and in balance, touching can affect proper operation. Also resoldering may affect correct operation. Since 2009 relays have tamper proof seals fitted and once broken, warranty is void.

Most relay defects are caused by installation faults such as overvoltage, spikes/transients, high/short current far exceeding the relay specifications. When returning the relays for investigation, please provide all information on the RMA form. Send defective relays back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.

RMA procedure see [www.morssmitt.com](http://www.morssmitt.com)

## Timer relay WDDE-U200/U300

### Ordering scheme

WDDE-U		-	-		
Coil voltages	201			24 VDC	
	207			36 VDC	
	202			48 VDC	
	208			55 VDC	
	209			64 VDC	
	203			72 VDC	
	211			80 VDC	
	205			96 VDC	
	204			110 VDC	
	210			120 VDC	
	213			125 VDC	
	215			220 VDC	
		306			240 VAC 50/60 Hz
Options (add as many options as needed)		C		Low temperature (-40 °C) - Max contact current 8 A	
		K		Extra dust protection, IP50	
		Q		Double zener diode	
Time ranges Delay-on and Delay-off			0.1...1 s		
			0.3...3 s		
			0.6...6 s		
			1...10 s		
			3...30 s		
			6...60 s		
			0.3...3 min		
			0.6...6 min		
			1...10 min		
			3...30 min		
			Fixed	No knob	

Examples:

#### WDDE-U204-C-3 s

Description: WDDE-U204 relay, Unom 110 VDC, low temperature, fixed pulse 3 s

**Timer relay**  
**WDDE-U200/U300**

---

 **Over 10 million Mors Smitt relays in use in rail transport applications worldwide!**

**Mors Smitt Asia Ltd.**  
26/F., Casey Aberdeen House  
38 Heung Yip Road, Wong Chuk Hang  
Hong Kong  
Tel: +852 2343 555  
[sales.msa@wabtec.com](mailto:sales.msa@wabtec.com)

**Mors Smitt France SAS**  
2 Rue de la Mandinière  
72300 Sablé-sur-Sarthe, France  
Tel: +33 (0) 243 92 82 00  
[sales.msf@wabtec.com](mailto:sales.msf@wabtec.com)

**Mors Smitt UK**  
Graycar Business Park,  
Burton on Trent, DE13 8EN, UK  
Tel: +44 (0)1283 357 263  
[sales.msuk@wabtec.com](mailto:sales.msuk@wabtec.com)

**Wabtec Netherlands B.V.**  
Darwinstraat 10,  
6718 XR Ede, Netherlands  
Tel: +31 (0)88 600 4500  
[wnl\\_salessupport@wabtec.com](mailto:wnl_salessupport@wabtec.com)

**Mors Smitt Technologies Ltd.**  
1010 Johnson Drive,  
Buffalo Grove, IL 60089-6918, USA  
[salesmst@wabtec.com](mailto:salesmst@wabtec.com)

**RMS Mors Smitt**  
19 Southern Court  
Keysborough, VIC 3173, Australia  
Tel: +61 (0)3 8544 1200  
[sales.rms@wabtec.com](mailto:sales.rms@wabtec.com)

(c) Copyright 2023

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.