

/// Plug-in railway relay with 4 C/O contacts

Rugged plug-in relays for extreme reliability, within long endurance applications and harsh environments

FDA4-U200N

Flashing relay

Part of D-platform



Description

Plug-in electronic railway flashing relay with four change-over contacts for reliable switching of very low currents (1 mA @ 5 VDC) up to currents of 10 A @ 110VDC. When the relay is activated the coil starts with an interval. The pulse time and interval time are equal. The relay is supplied with a fixed pulsing frequency. The relay can also be supplied with an adjustable pulsing frequency (relay with knob).

The relay is equipped with two LEDs which indicate the presence of power supply and the energizing of the coil.

The built-in magnetic arc blow-out ensures adequate DC breaking capacity resulting in long contact life. The integrated contact separation prevents cross pollution of contacts. On the relay cover the serial number and data matrix code are shown for ease of traceability.

The construction of the relay and choice of materials make the FDA4-U200N relay suitable to withstand low and high temperatures, shock & vibration and dry to humid environments.

No external retaining clip needed as integrated 'snap-lock' will hold relay into socket under all circumstances and mounting orientations.


Compact design, choice of many options and a wide range of sockets make the FDA4-U200N relay an easy and flexible solution to use.

Optional greenline version with a energy saving of more than 50 % and contact configuration 2 C/O + 2 N/O contacts.

Features

- Flashing relay (symmetrical)
- Duty cycle: 50 %
- Compact plug-in design
- 4 C/O contacts
- Pulse frequency adjustable with a lockable knob
- Also available with a fixed pulse frequency (no knob)
- Magnetic arc blow-out ensuring long contact life
- Two LEDs for status indication, red or green
- Integrated back EMF suppression diode
- Minimum switching current 1 mA
- Maximum continuous current 10 A
- Wide temperature range -40 °C...+70 °C
- Mechanical life > 30 million operations
- Electrical life e.g. > 10 million operations at 0.5 A, 24 VDC
- Data matrix code with serial number for traceability
- Integrated snaplock, no external retaining clip needed
- Transparent cover for visual inspection
- Many options and sockets available

Connection diagram

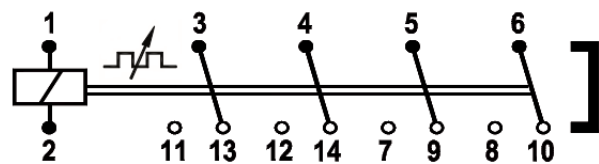

Application

The FDA4-U200N is used in demanding rolling stock applications where a pulse frequency in output is necessary after activating the relay. Relays continue to play a vital role in reliable train operation. Key functions are galvanic isolation between control (computers/ PLC's) and power circuits providing system isolation, contact multiplication and amplification.

Other unique features are:

- predictable failure behavior (Fail Safe) making system safety validation a lot more simple than using computer based solutions like PLC's
- long term availability (no obsolescence)
- easy maintenance by plug-in feature and transparent cover
- unlike more sensitive electronics, relays are insensitive to EMI

Using these features one can build a hardwired, fail safe control system which is cyber secure and insensitive to electro magnetic disturbances and surges. Relays are ideal to use in trains for signal transfer/repeat, safety interlocking functions (brake - doors), load on-off switching and sub-system isolation.

Railway compliance

EN 50155: 2017	EN 50121-3-2: 2016
IEC 60571: 2012	EN 45545-2: 2020
IEC 60947-5-1: 2016	NF F16-101/102
IEC 61373: 2010	IEC 60947-5-4: 2002




Timer relay FDA4-U200N

Options


- Gold plated contacts
- Greenline > 50 % energy saving
- IP50 dust protection
- LED indicators **green** or **red**
- AgSnO₂ contacts, weld resistant for capacitive loads
- Double zener diode
- AC/DC coil
- Double make/double break contacts
- Keying (coding relay to correct socket)

Remark: Not all combinations possible

Dimensions (mm)

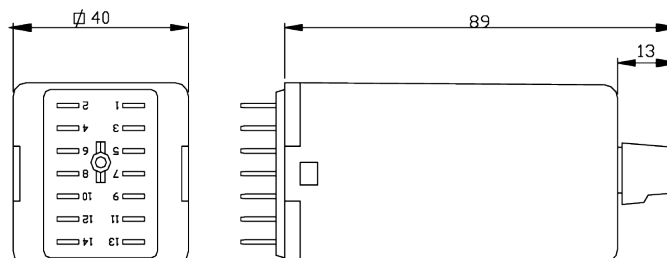

Timing diagram

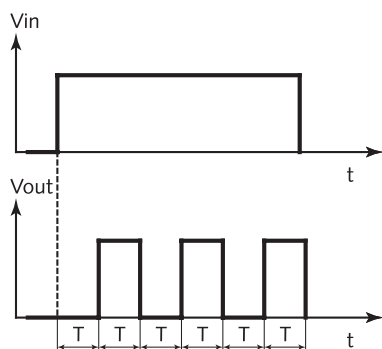

Weight

~ 145 g

Serializing

Each relay is marked with a unique serial number to which link important information and test results.

The GTIN (Global Trade Item Number) and part number are printed on each relay in both text and data matrix code according the worldwide recognized GS1 standard, being able to scan each relay for logistical and traceability purposes.

Example:

Pulse frequency: 60 imp/min

T = 0.5 s

Sockets

		Mounting			
		Surface / Wall	35 mm rail	Panel / Flush	PCB
Terminal connection	Screw	V23	V23	-	-
	Screw - wide terminals	V22 BR	V23 BR	-	-
	Spring clamp	V29	V29	V33	-
	Faston	-	-	V31	-
	Crimp	-	-	V26	-
	Solder tag	-	-	V3	-
	PCB	-	-	-	V32

For more information see the respective datasheets

Timer relay FDA4-U200N

Technical specifications

Time delay characteristics

Pulse function	Flashing (symmetrical), duty cycle 50 %
Available adjustable pulse frequencies	20-60 imp/min 40-120 imp/min 60-180 imp/min
Available fixed pulse frequencies	Any frequency between 1/60 - 300 imp/min
Accuracy	Adjustable pulse frequency Maximum deviation between visual setting of the knob and set time is $\pm 8 \%$ of full scale value Adjustable pulse frequency, pre-set in factory Maximum deviation $\pm 4 \%$ of full scale value Fixed pulse frequency Maximum deviation $\pm 0.5 \%$ of fixed time
Repeatability	Adjustable pulse frequency Maximum deviation $\pm 2 \%$ of set time Fixed pulse frequency Maximum deviation $\pm 0.5 \%$ of fixed time
Pulse frequency variation	vs voltage variation $\pm 0.05 \%$ / % deviation from U_{nom} vs temperature variation $\pm 0.02 \%$ / K deviation from 20°C
Recovery time ¹	< 0.1 s
Release time	< 30 ms
Maximum permissible ripple	50 %
Example pulse frequency: Relay FDA4-U204N-Lr 100 imp/min Accuracy $\pm 0.5 \%$: pulse frequency after set in factory is for example 100.5 imp/min (worst case situation) Actual situation: - Supply voltage 70% $U_{nom} \Rightarrow 30 \%$ different compared to $U_{nom} \Rightarrow$ pulse frequency variation $30 \times 0.05 \%$ = 1.5 % - Ambient temperature $+60^\circ\text{C} \Rightarrow 40$ degrees different compared to $20^\circ\text{C} \Rightarrow$ pulse frequency variation $40 \times 0.02 \%$ = 0.8 % Real pulse frequency: 100.5 imp/min $\pm 0.5 \%$ (repeatability) $\pm 1.5 \%$ (voltage variation) $\pm 0.8 \%$ (temperature variation) = 100.5 imp/min $\pm 2.8 \%$ In this case every actual pulse frequency will be between 97.7 and 103.3 imp/min.	

¹ Required time between de-activating and re-activating the relay to guarantee correct working

Coil characteristics

Operating voltage range	0.7...1.25 U_{nom}
Nominal power consumption	During time delay < 0.875 W (220 V) < 0.375 W (110 V) Lower voltage = lower power
	After time delay < 3.6 W (220 V) < 3 W (110 V) Lower voltage = lower power

Type	U_{nom} (VDC)	U_{min} (VDC)	U_{max} (VDC)	U_{reset} (VDC)	$U_{drop-out}$ (VDC)
FDA4-U201N-xx	24	16.8	30	11	2.4
FDA4-U207N-xx	36	25.2	45	11	3.6
FDA4-U202N-xx	48	33.6	60	11	4.8
FDA4-U203N-xx	72	50.4	90	11	7.2
FDA4-U205N-xx	96	67.2	120	44	9.6
FDA4-U204N-xx	110	77.0	138	44	11.0

Other types on request

Remarks:

- U_{min} is the must-operate voltage at which the relay will pick up in all circumstances (worst-case situation), in practice the relay picks up at a lower voltage (take the interval into account)
- $U_{drop-out}$ is the must-release voltage at which the relay has dropped-out in all circumstances (worst-case situation), in practice the relay drops out at a higher voltage ($U_{release}$)
- U_{reset} : Electronic time function resets below this value and LED is OFF below this value
- Always select the nominal voltage as close as possible to the actual voltage in the application

Timer relay FDA4-U200N

Contact characteristics

Contact configuration	4 C/O
Peak inrush current	NF F 62-002 200 A (withstand > 10 x 200 A @ 10 ms, 1 min) 80 A (withstand > 10 x 80 A @ 200 ms, 1 min) 40 A (withstand > 10 x 40 A @ 500 ms, 1 min) 30 A (withstand > 10 x 30 A @ 1000 ms, 1 min)
Maximum continuous current	10 A
Maximum switching voltage	250 VDC, 440 VAC
Minimum switching voltage*	5 V
Minimum switching current*	1 mA
Maximum breaking capacity (> 50.000 operations)	110 VDC, 10 A (resistive load) 72 VDC, 5 A (L/R ≤ 40 ms) 110 VDC, 0.5 A (L/R ≤ 40 ms)
Contact resistance	≤ 15 mΩ (initial)
Material	Ag standard (optional AgSnO ₂ , Au on Ag)
Contact gap	0.7 mm
Contact force	> 200 mN

* Standard silver contacts tested in lab conditions. However we strongly advise to always use gold plated contacts when switching very low currents, as long time reliable operation depends also on switching frequency and environmental conditions. Take recommendations for long time reliability on page 11 into account.


Contact reliability according IEC 60947-5-4

Contact switching load	Contact material	Failure rate λ_c^*	Mean number of operating cycles to contact failure m_c^*
1 mA, 5 VDC resistive	Gold (option E)	5×10^{-8}	20.000.000
5 mA, 24 VDC resistive	Gold (option E)	4×10^{-8}	25.000.000
10 mA, 50 VDC resistive	Silver (standard)	2×10^{-8}	50.000.000

*at confidence level 90%

Note: tested in laboratory environment at ambient temperature 20 °C. To underline the reliability of low current switching in parallel a 1 mA / 5 V test was done using standard silver contacts, resulting in the same reliability. But since real train conditions are far different from lab conditions we strongly advise gold plated contacts for such low contact ratings. Take recommendations for long time reliability on page 11 into account.

Electrical characteristics

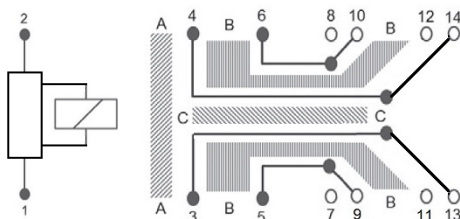Dielectric strength	Pole-pole Cont-coil Open contacts	4 kV, 50 Hz, 1 min 2.5 kV, 50 Hz, 1 min 2.5 kV; 50 Hz; 1 min		
Clearance and creepage according IEC 60664-1 / EN 50124-2				
				
Section	Clearance	Creepage	Material group	Unom*
A	≥ 4.0 mm	≥ 4.0 mm	I (CTI600)	≤ 450 V
B	≥ 3.0 mm	≥ 3.0 mm	I (CTI600)	≤ 300 V
C	≥ 6.1 mm	≥ 6.1 mm	I (CTI600)	≤ 696 V
*For basic insulation, PD2 and OV3				
Pulse withstanding	IEC 60255-5	5 kV (1.2/50 μs)		
Insulation resistance	EN 50155	> 20 MΩ (test voltage 500 VDC)		
EMC	EN 50121-3-2	Compliant		

Timer relay FDA4-U200N

Mechanical characteristics

Torque value screw to lock knob	0.2-0.4 Nm
---------------------------------	------------

Environmental characteristics

Vibration	IEC 61373, Category I, Class B, Body mounted
Shock	IEC 61373, Category I, Class B, Body mounted
Operating temperature	-40 °C...+70 °C
Operating temperature class	OT4
Humidity	93%
Maximum altitude	2000 meter. Higher altitudes are possible but have consequences mentioned in IEC 60664 (for example 5000 meter with bigger clearance distance)
Salt mist	IEC 60068-2-11, class ST4
Dry heat	IEC 60068-2-2 test Be
Damp heat	IEC 60068-2-30, Test method Db variant 2
Protection	IEC 60529, IP40 (relay on socket) (with option K: IP50)
Fire & smoke	NF F 16-101, NF F 16-102, EN 45545-2: HL3 for requirements R22, R23, R26
Insulation materials	Cover: polycarbonate Base: nylon
Natural cooling or forced ventilation constraints for the equipment	None: no extra measures necessary, relays can be mounted tightly together to save space
REACH: Registration, Evaluation, Authorisation and Restriction of Chemicals	European Regulation No 1907/2006

RAMS features

Life class	L4 (Useful life 20 years, take electrical life cycle curves into account)
Repairability	Non-repairable
Maintenance instructions	See inspection/maintenance on page 12
Reliability / lifetime Mechanical lifetime Low energy electrical lifetime High energy electrical lifetime	> 30 million operations, maximum switching frequency 1 Hz (1 million operations at -40 °C) 5 million operations, maximum switching frequency 1 Hz See life cycle curves on page 8
Storage precautions	Storage temperature: -50 °C...+85 °C Store in original packaging Silicon free environment


Timer relay FDA4-U200N

Product labeling

Part number identification	Part number mentioned on top side relay
Serial number identification	Serial number mentioned on top side relay Serial number = Lot number + year + week + reference number
Data matrix code	According GS1 standard, placed on top side relay 01 Global Trade Item Number 240 Part number 21 Serial number Example: 011234567890123240123456789211234562209001
Revision index identification	Linked to serial number
Terminals	Identification on bottom plate relay Relay to be used with Mors Smitt relay sockets which have clear terminal identification on each socket



Railway compliancy

EN 50155: 2017	Railway applications - Rolling stock - Electronic equipment
IEC 60571: 2012	Railway applications - Electronic equipment used on rolling stock
IEC 60947-5-1: 2016 / IEC 60947-5-4: 2012	Low-voltage switchgear and controlgear
IEC 61373: 2010	Railway applications - Rolling stock equipment - Shock and vibration tests
EN 50121-3-2: 2016	Railway applications - Electromagnetic compatibility
NF F16-101/102	Railway rolling stock - Fire behavior
EN 45545-2: 2020	Railway applications - Fire protection on railway vehicles Part 2: Requirements for fire behavior of materials and components

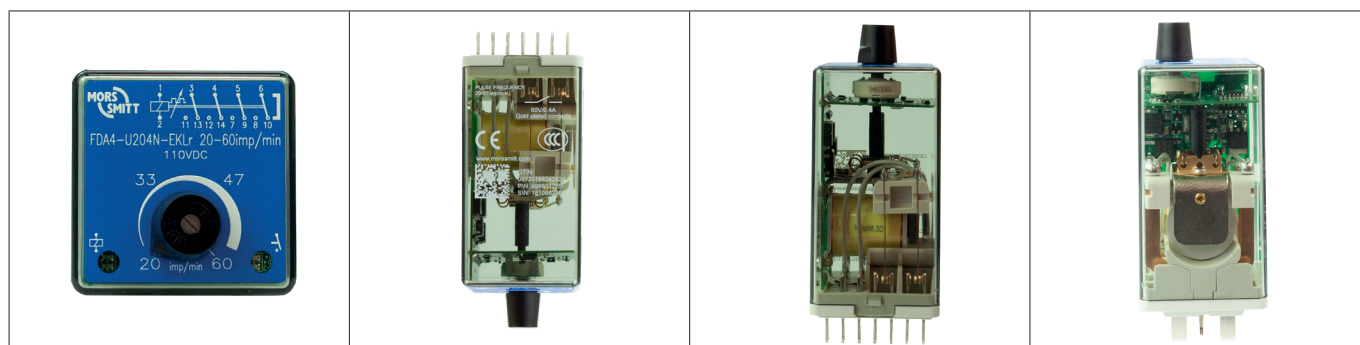

Timer relay FDA4-U200N

Options

Code	Description	Remark	Cannot be combined with:
Standard options:			
E*	Au; Gold plated contacts		M
G	Greenline: > 50 % energy saving	2 C/O and 2 N/O contacts 	Y
K	Extra dust protection	IP50 Cat 2 for the relays mounted in a Mors Smitt socket. Application PD1/PD2 and contact load > 0.5 A.	
Lg**	Green LED indicator		
Lr**	Red LED indicator		
Q	Double zener diode over coil	Maximum allowed peak voltage 180 V, higher voltage will damage the diode.	X2
Y	Double make/double break contacts, contact gap 1.4 mm	2 C/O DM/DB 	G
Keying	Coil coding relay	Also order socket with keying	
Special options:			
M	AgSnO ₂ ; "non-weldable" contacts, used for capacitive loads e.g. LED lighting	Icontact > 100 mA	E
X2	AC/DC coil		Q

* Gold plated contacts characteristics




Material	Ag, gold plated
Maximum switching voltage	60 V (higher voltages may be possible, contact Mors Smitt for more information)
Maximum switching current	400 mA (at higher rate gold will evaporate, then the standard silver contact rating of minimum 10 mA and 12 V is valid)
Minimum switching voltage	5 V
Minimum switching current	1 mA

** Lg or Lr must be selected in the ordering scheme to have the correct LED color

Remark: For application support or technical product support, contact your local Mors Smitt sales office (see contact details on last page).

Timer relay FDA4-U200N

Electrical life expectancy

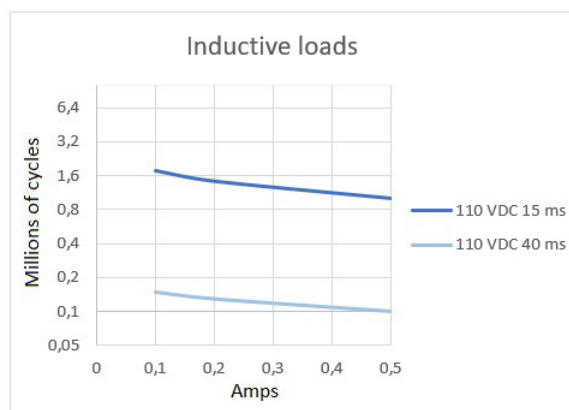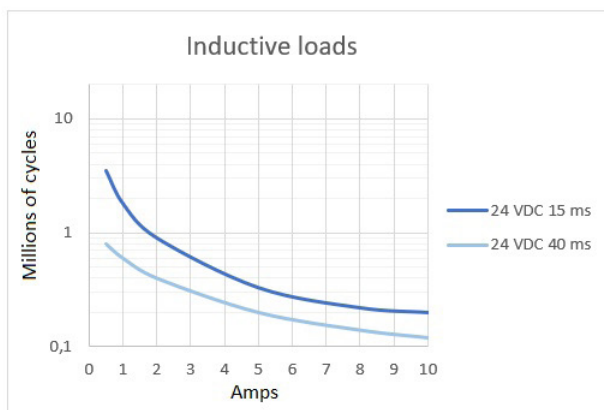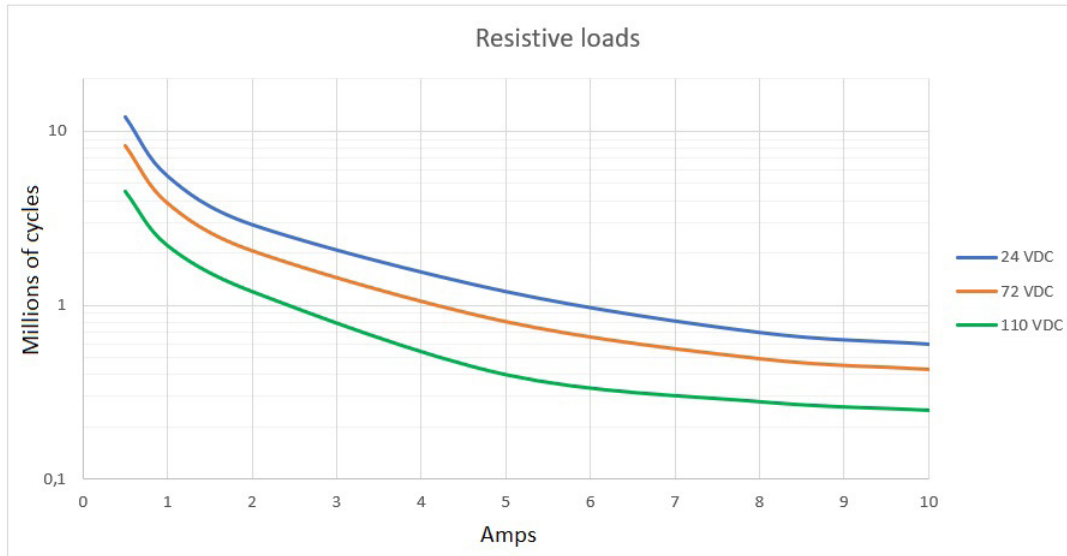

By connecting 2 contacts in series the DC current breaking capacity is increased by 50 %. Electrical lifetime is tested under laboratory conditions with switching frequency 0.33 Hz.

Note: The actual electrical lifetime in the application is affected by the switching frequency, type of contact (N/O or N/C), environmental conditions, etc.

For highly inductive loads Mors Smitt A400/B400 relays with standard double make double break contacts are the optimal solution.

Self-cleaning contacts

Each contact attracts organic molecules. When the surface is loaded with a voltage, like a relay contact, the attracting force is even higher. Therefore on each contact surface there is organic "pollution".

Mors Smitt relays are designed to self-clean during switching of the contacts:

1. Mechanical wiping action: the "pollution" is swept aside.
The movement of opposing contacts when they make contact: this wiping action cleans the surface of both contacts. Mors Smitt relays are designed for optimal wiping action: enough to clean the surface and not too much to prevent contact wear.
2. Electrical cleaning: the "pollution" is burnt away.
A current at sufficient level will evaporate organic "pollution". When switching loads (typically of a current >100 mA), the "pollution" is totally burnt away and a clean contact surface is available.

This results in reliable contact operation without interference due to contact pollution.

Timer relay FDA4-U200N

Mounting possibilities/sockets

				
V3	V22BR	V23	V23BR	V26
				
V29	V31	V32	V33	

Surface/wall mounting

338000302	V22BR	Screw socket, wall mount, front connection (9 mm terminals)
338000580	V23	Screw socket, wall mount, front connection (7.5 mm terminals)
338000610	V29	Spring clamp socket, wall mount, front dual connection (2.5 mm ²)

Rail mounting

338000580	V23	Screw socket, rail mount, front connection (7.5 mm terminals)
338000402	V23BR	Screw socket, rail mount, front connection (9 mm terminals)
338000610	V29	Spring clamp socket, rail mount, front dual connection (2.5 mm ²)

Panel/flush mounting

338100100	V3	Solder tag socket, panel mount, rear connection
328400100	V26	Crimp contact socket, panel mount, rear connection, A260 crimp contact
338000560	V31	Faston connection socket, rear dual connection (4.8 x 0.8 mm)
338000670	V33	Push-in terminal socket, panel mount, rear dual connection (3.3 mm ²)

PCB mounting


338000561	V32	PCB soldering socket
-----------	-----	----------------------

No external retaining clip needed as the 'snap-lock' will hold the relay into the socket under all circumstances and mounting directions (according shock & vibration requirements IEC 61373, Category I, Class B, Body mounted). If regulations require external retaining clips, these are available as well.

For more details see datasheets of the sockets on www.morssmitt.com

Timer relay FDA4-U200N

Mechanical keying relay and socket (optional)

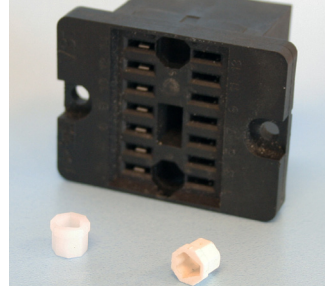


Function:

- To prevent wrong installation
- To prevent damage to equipment
- To prevent unsafe situations

Using keyed relays and sockets prevents a relay is inserted in a wrong socket. For example it prevents that a 24 VDC relay is put in a 110 VDC circuit. Positive discrimination is possible per different function, coil voltage, timing, monitoring, safety and non-safety.

The D relay keying option provides $8 \times 8 = 64$ possibilities. Upon ordering the customer simply indicates the need for the optional keying. Mors Smitt will assign a code to the relay and fix the pins into the relay. The sockets are supplied with loose key receptacles. Inserting the keys into the socket is very simple and self explanatory.

Remark: Sockets and relay shown are examples.

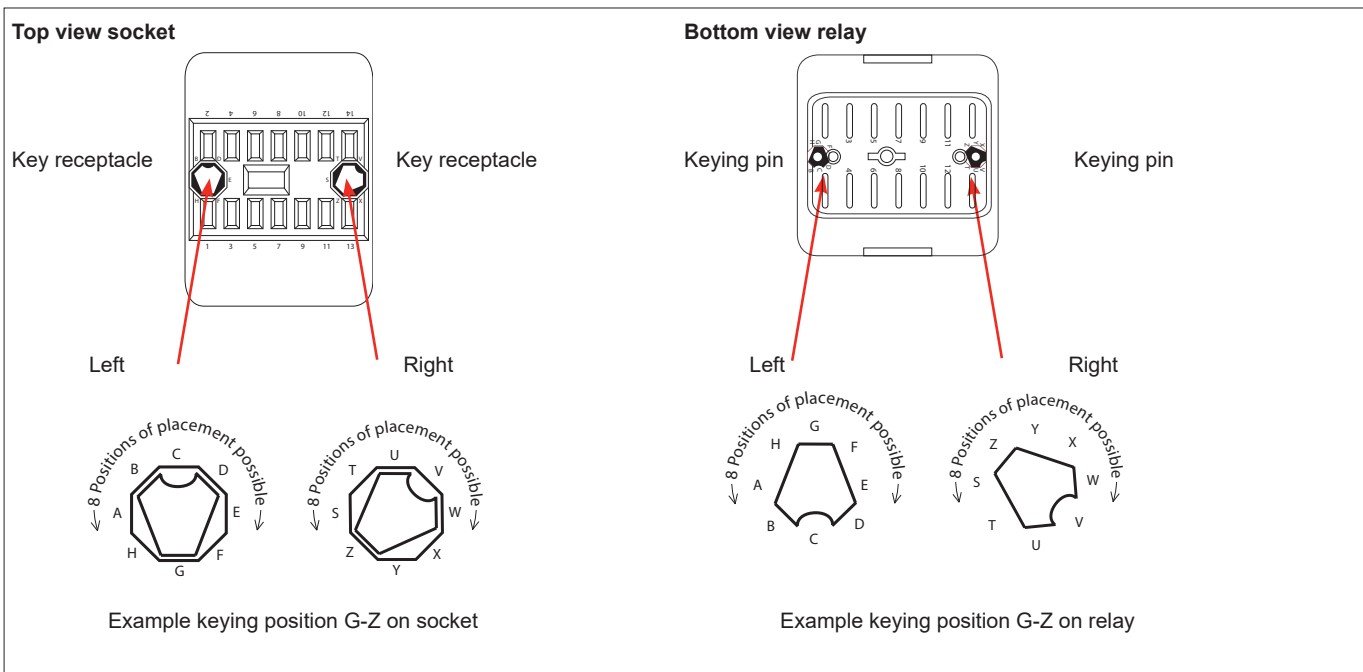


Timer relay FDA4-U200N

Important for relay selection and operation

Make sure the relay is suitable for the application. For critical applications (for example: green loop applications) relays should be checked for proper operation during periodic inspection.

Contact switching current

Each relay has a range of switching currents in which it performs optimally: the sweet spot. As switching currents are decreasing in field applications, the FDA4-U200N relay has an improved sweet spot compared to its predecessors.

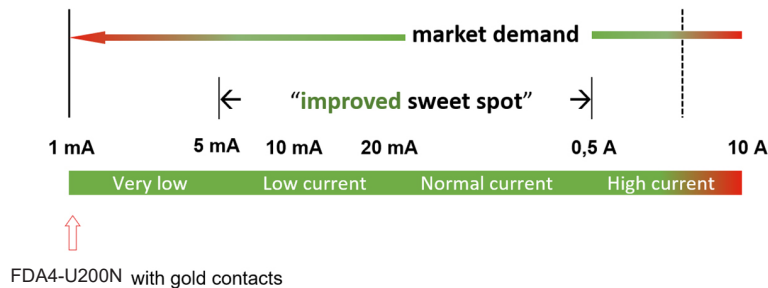

Recommendations for long time contact reliability

For relays to enable failure free performance over a very long operational time, it is important to create the right circumstances. In any relay, contact usage and atmospheric conditions influence the contact surface. To counter this effect it is common practice to use a safety factor of > 2 to ensure long time contact reliability.

Therefore for long time contact reliability we recommend:

- Silver contacts: a minimum contact current of 20 mA per contact
- Gold contacts: a minimum contact current of 10 mA per contact
- Double Make Double Break contacts: a minimum contact current of 40 mA per contact
- When low currents are switched not frequently, e.g. 10 mA once a day, it is advised (next to gold plated contacts) to put similar contacts within the same relay in parallel
- With higher load switching, e.g. 110 VDC and > 1 A, put relay contacts in series
- Rule of thumb: any relay works best with switching currents > 20 mA in DC environment when frequently switched. When not switched frequently a higher switching current like 50 mA is better for a long reliable operational time
- When switching capacitive loads (e.g. LED lighting) always use silver tin oxide contacts (minimal contact current 100 mA)
- Check relays regularly, for example with the Mors Smitt Portable Relay Tester and visually through the transparent cover


Instructions for use

Installation

Before installation or working on the relay: disconnect the power supply first (no hot swapping)! Install socket and connect wiring according to the terminal identification. Plug relay into the socket ensuring there is no gap between the bottom of relay and the socket. Reverse installation into the socket is not possible due to the mechanical blocking snap-lock feature. Check to ensure that the coil connection polarity is not reversed. Relays can be mounted tightly together to save space. When rail mounting is used, always mount the socket in the direction of the UP arrow, to have proper fixation of the socket on the rail. Torque value screw to lock knob: 0.2-0.4 Nm

Warning!

- Never use silicon in the proximity of the relays
- Do not use the relay in the presense of flammable gas as the arc generated from switching could cause ignition
- To remove relays from the socket, employ up and down lever movements. Sideway movement may cause damage to the coil wires

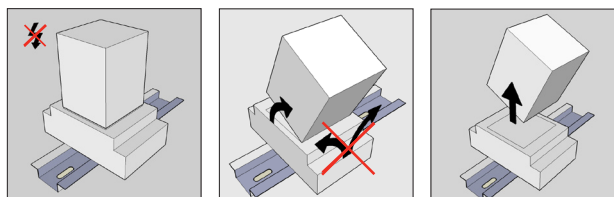

- Relays should never be swapped to other circuit positions when taken out of its socket for inspection or fault finding, always place it back into the original position to prevent contact resistance problems. Contact resistance problems can be created when swapping relays between different circuit loads due the contact wear/condition having changed during its operational life.

Timer relay **FDA4-U200N**

Operation

After installation always apply the rated voltage to the coil to check correct operation. Long term storage may corrode the silver on the relay pins. When plugging the relay into the socket, the female bifurcated or trifurcated receivers will automatically cut through the corrosion on the pins and guarantee a reliable connection.

Before actual use of relays, it is advised to switch the load several times with the contacts. The contacts will both be electrically and mechanically cleaned due to the positive wiping action. Sometimes a contact can build up increased contact resistance ($\leq 15 \text{ m}\Omega$ when new). When using silver contacts one can clean the contact by switching a contact load a few times using $>24 \text{ VDC}$ & $\sim 2\text{A}$. Increased contact resistance is not always problematic, as it depends on circuit conditions. In general a contact resistance of 1Ω is no problem, consult Mors Smitt for more information.

Condensation inside the relay housing can occur when it moves from a warm (and humid) environment to a colder environment. This is a normal phenomenon and will not affect the function of the relay. Materials in the relay have no hygroscopic properties.

Inspection / maintenance

Correct operation of the relay can easily be checked as the transparent cover provides good visibility of the moving contacts. If the relay does not seem to operate correctly, check for presence of the appropriate coil voltage and polarity using a suitable multimeter. If a LED is fitted, it indicates voltage presence to the coil. If coil voltage is present, but the relay does not operate, a short circuit of the suppression diode is possible (this may have been caused due to reversed coil connection).

Relays can easily be tested with the Mors Smitt Relay Tester. More information on: www.morssmitt.com.

If the relay doesn't work after inspection, replace the relay with a similar model. Do not attempt to open the relay cover or try to repair. Contacts are calibrated and in balance, touching can affect proper operation. Also resoldering may affect correct operation. Since 2009 relays have tamper proof seals fitted and once broken, warranty is void.

Most relay defects are caused by installation faults such as overvoltage, spikes/transients, reversed coil connection, high/short current far exceeding the relay specifications. When returning the relays for investigation, please provide all information on the RMA form. Send defective relays back to the manufacturer for repair or replacement. Normal wear and tear or external causes are excluded from warranty.

RMA procedure see www.morssmitt.com

Timer relay FDA4-U200N

Ordering scheme

FDA4-U2		N -			Code	
Coil voltages	01				24 VDC	
	02				48 VDC	
	03				72 VDC	
	04				110 VDC	
	05				96 VDC	
	07				36 VDC	Cannot be combined with:
Options (add as many options as needed, always in alphabetical order)		E			Gold plated contacts	M
		G			Greenline > 50 % energy saving	Y
		K			Extra dust protection, IP50	
		Lg*			Green LED indicator*	
* a LED indicator is MANDATORY		Lr*			Red LED indicator*	
		Q			Double zener diode	X2
		Y			Double make/ double break	G
Special options (minimum order quantity: 20)		M			AgSnO ₂ contacts, highly resistant to welding	E
		X2			Coil for both DC and AC	Q
Pulse frequency			Fixed		Selectable between 1/60 imp/min and 300 imp/min	
			Adjustable		On request	
Keying code (optional, leave blank if not required)					Standard, silver contacts	
				AS	24 VDC	
				AY	36 VDC	
				AT	48 VDC	
				AU	72 VDC	
				AV	110 VDC	
					Option E, gold contacts	
				DT	24 VDC	
				FV	36 VDC	
				HU	48 VDC	
				AZ	72 VDC	
				HV	110 VDC	
					Option M, silver tin oxide contacts	
				GT	24 VDC	
				HT	36 VDC	
				GU	48 VDC	
				GV	72 VDC	
				GW	110 VDC	

Examples:

FDA4-U204N-ELr 40-120 imp/min

Description: FDA4-U200N relay, Unom 110 VDC, gold plated contacts, red LED indicators, adjustable pulse frequency of 40-120 imp/minute.

FDA4-U201N-KLgQ 35 imp/min code AS

Description: FDA4-U200N relay, Unom 24 VDC, extra dust protection, green LED indicators, double zener diode, fixed pulse frequency 35 imp/minute, keying code AS.

FDA4-U202N-Lr 20-60 imp/min (30)

Description: FDA4-U200N relay, Unom 48 VDC, red LED indicators, adjustable pulse frequency of 20-60 imp/minutes and preset by factory on 30 imp/minute.

Timer relay
FDA4-U200N

 **Over 11 million Mors Smitt relays in use in rail transport applications worldwide!**

Mors Smitt Asia Ltd.
26/F, Casey Aberdeen House
38 Heung Yip Road, Wong Chuk Hang
Hong Kong
Tel: +852 2343 555
sales.msa@wabtec.com

Mors Smitt France SAS
2 Rue de la Mandinière
72300 Sablé-sur-Sarthe, France
Tel: +33 (0) 243 92 82 00
sales.msf@wabtec.com

Mors Smitt UK
Graycar Business Park
Burton on Trent, DE13 8EN, UK
Tel: +44 (0)1283 357 263
msu_sales@wabtec.com

Wabtec Netherlands B.V.
Darwinstraat 10
6718 XR Ede, Netherlands
Tel: +31 (0)88 600 4500
wnl_salessupport@wabtec.com

Mors Smitt Technologies Ltd.
1010 Johnson Drive
Buffalo Grove, IL 60089-6918, USA

RMS Mors Smitt
19 Southern Court
Keysborough, VIC 3173, Australia
Tel: +61 (0)3 8544 1200
sales.rms@wabtec.com

(c) Copyright 2025

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.