


/// BR930 Series – Relay Module Rectifier / Resistor Unit

TY370/GRP41

QR1 6Ω


Rectifier / Resistor Unit.

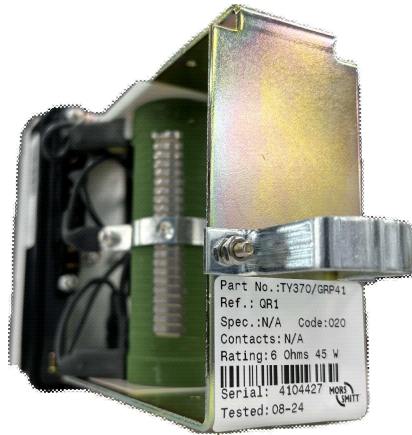

Features

The TY370/GRP41 is a rectifier/resistor unit used to rectify the supply for a lamp proving relay. An adjustable resistor is positioned in series with the load and set so that the required proportion of current is shunted to the relay via the rectifier. The resistor value (several are available) governs the sensitivity of the arrangement. Of compact modular plug-in design it has non-weld contacts and is equipped with a safety interlocking system (pin code) for insertion into mating plugboards.

Contact arrangement

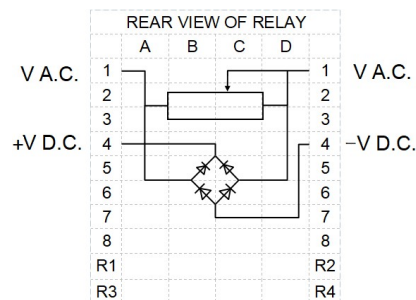

General characteristics

PADS Reference	-
Pin code	20 ABDEH
Contact arrangement	N/A
Resistor Value	6Ω
Resistor Rating	50W
Rectifier Rated Voltage	1000V
Rectifier Rated Current	35A
Weight	0.7 kg
Plugboard	TY081-001 PADS Ref 0085/002081 See plugboard datasheet for more information

 Over 10 million Mors Smitt relays in use in rail transport applications worldwide!

Mors Smitt Asia Ltd.
 26/F., Casey Aberdeen House
 38 Heung Yip Road, Wong Chuk Hang
 Hong Kong
 Tel: +852 2343 555
sales.msa@wabtec.com

Mors Smitt France SAS
 2 Rue de la Mandinière
 72300 Sablé-sur-Sarthe, France
 Tel: +33 (0) 243 92 82 00
sales.msf@wabtec.com

Mors Smitt UK
 Graycar Business Park,
 Burton on Trent, DE13 8EN, UK
 Tel: +44 (0)1283 357 263
sales.msuk@wabtec.com

Wabtec Netherlands B.V.
 Darwinstraat 10,
 6718 XR Ede, Netherlands
 Tel: +31 (0)88 600 4500
sales.msbv@wabtec.com

Mors Smitt Technologies Ltd.
 1010 Johnson Drive,
 Buffalo Grove, IL 60089-6918, USA
mst_salessupport@wabtec.com

RMS Mors Smitt
 19 Southern Court,
 Keysborough, VIC 3173, Australia
 Tel: +61 (0)3 8544 1200
sales.rms@wabtec.com

(c) Copyright 2025

All rights reserved. Nothing from this edition may be multiplied, or made public in any form or manner, either electronically, mechanically, by photocopying, recording, or in any manner, without prior written consent from Mors Smitt. This also applies to accompanying drawings and diagrams. Due to a policy of continuous development Mors Smitt reserves the right to alter the equipment specification and description outlined in this datasheet without prior notice and no part of this publication shall be deemed to be part of any contract for the equipment unless specifically referred to as an inclusion within such contract. Mors Smitt does not warrant that any of the information contained herein is complete, accurate, free from potential errors, or fit for any particular purpose. Mors Smitt does not accept any responsibility arising from any party's use of the information in this document.